



PLATFORM SCALES

type 34 SA 250

type 46 SA 250

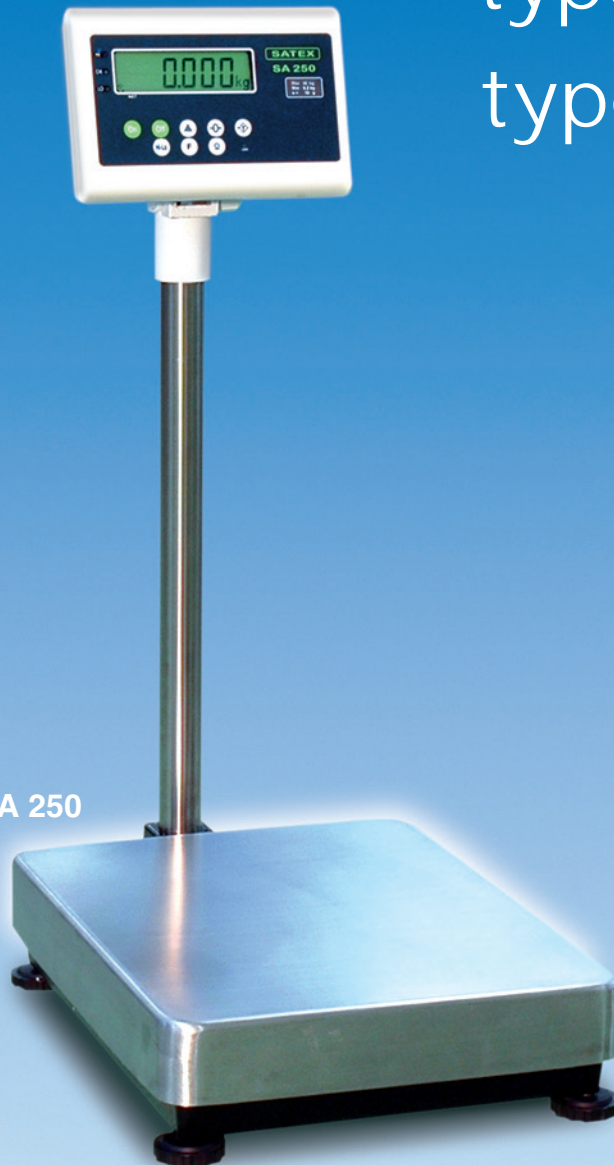

Type 34 SA 250

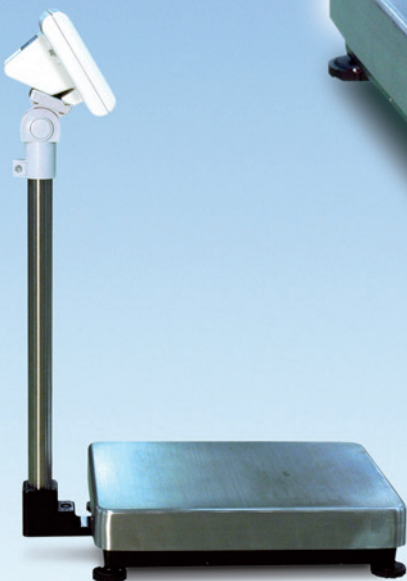

- ▶ Weighing capacities 6 . . . 200 kg
- ▶ Reading accuracy from 1 gram up
- ▶ CE approval for legal trade
- ▶ Platforms: 35 x 45 cm or 45 x 60 cm
- ▶ RS 232 data output
- ▶ Calibration by the user
- ▶ Built in battery and charger

SATEX

SATEX


- ▶ **CE approved weighing**
(use for trade)
- ▶ **Piece counting program**
- ▶ **Check weighing program**
- ▶ **High resolution versions**
- ▶ **Data - printer output**
- ▶ **Built in battery and charger**
- ▶ **Pole included**
- ▶ **English manual**




Turnable display



Check weighing with signal LED's

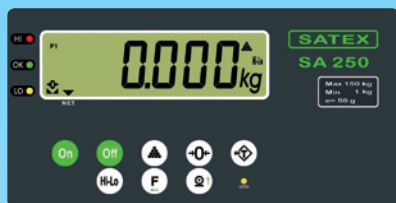

Display front with waterproof keys and back lit display

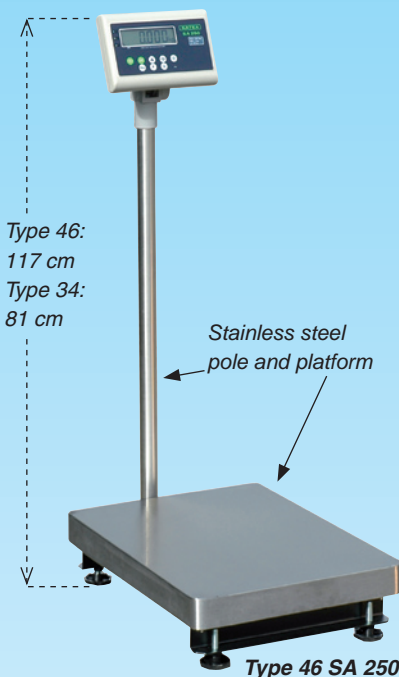

Type 46: 117 cm
Type 34: 81 cm

Stainless steel pole and platform

Type 46 SA 250

READING

Large and bright 25 mm high LCD display figures with back lighting. Conversion speed 5 Hz. Tare capacity 100% = zero setting over the total weighing range. The automatic zero track keeps the reading at zero with an empty scale. The display unit may be turned over in order to have a good reading angle of the weight reading.

CHECK WEIGHING

Two weight margins, settable via the operating keys as Hi and Low values, for quick weight and dosing controls. Three LED's on the front panel show whether the weight is good, too high or too low. Several audible signals may be connected to the LED signals.

OPERATING KEYS

- on / off
- zero
- check weighing
- toggle: weighing-counting-checkweighing
- piece counting
- tare
- printing

MENU FUNCTIONS (a.o.)

- Auto zero track : off - on
- Display back light : off - on - auto
- Auto off scale : off - selectable time
- Check weighing : off - on
- Weight lock up : off - on
- Print / send data : key - auto - continuous
- Calibration : 1 or 3 points program

EXCITATION

Built in battery and charger for max. 75 hours of stand alone operation. Supplied with 9/230 VAC adaptor included.

USE FOR TRADE

At additional costs the scale may be supplied with a legal EC Certificate and is than allowed to use for trade.

The accuracy remains equal, whether the scale is delivered with or without Certificate. The High Resolution versions are allowed for internal weighing only.

MODELS		TECHNICAL SPECIFICATIONS			
Order nr.	Platform size	Weighing capacity	Scale division		
			Standard	High Resolution	
34 SA 250. 06 (HR)	35 x 45 cm	6 kg	2 g	1 g	
34 SA 250. 15 (HR)		15 kg	5 g	1 g	
34 SA 250. 30 (HR)		Free space between platform and display: 56 cm	30 kg	10 g	1 g
34 SA 250. 60 (HR)			60 kg	20 g	2 g
46 SA 250. 30 (HR)	45 x 60 cm	30 kg	10 g	2 g	
46 SA 250. 60 (HR)		60 kg	20 g	2 g	
46 SA 250. 150 (HR)		Free space between platform and display: 89 cm	150 kg	50 g	10 g
46 SA 250. 200 (HR)			200 kg	100 g	10 g
Accuracy	Standard resolution : Meets the legal tolerances for Class III weighing scales according to EN 45501 High resolution version : < 1 scale division.				
Calibration	Adjustment via the menu, using certified weights Class M1 Blocked at legal certified scales.				
Dimensions	Type 34 SA : 35 x 56 x 80 cm (wxdxh), weight 12,6 kg Type 46 SA : 45 x 69 x 117 cm (wxdxh), weight 23,1 kg				
Construction	Stainless steel weighplatform, coated metal frames, 4 leveling feet and a spirit level indicator. Turnable indicator in smooth IP 54 housing. HBM loadcell with 6 overload protections.				
Reading	LCD display with 25 mm high figures and soft green back lighting. The back lighting may be switch on or off or set at automatic switch on if the scales is used (> 0,0 kg).				
Auto off	The scale will be automatically shut down if not used during a selectable time: off, 5, 10, 20, 30 minutes.				
Excitation	Built in battery and charger for 75 hours stand alone operation, (30 hours at continuous display lighting). Charging time 20 hours. Supplied with 9/230 VAC mains adaptor included.				
EC approval	NMI Certificate nr. T 6918, n _{max} 3000 e.				
Packing	Type 34 SA : 45 x 82 x 26 cm (wxdxh), gross weight 15 kg Type 46 SA : 55 x 97 x 32 cm (wxdxh), gross weight 25 kg				

Verwijzing • CSO Marketing Communicatie • Almere • 2006